

第一步：打开机器上盖

Step 1: Open the machine cover



取下打印头下方白色泡棉

Remove the white foam from under the print head



第二步：装上色带

Step 2: Install the ribbon

按箭头方向旋转色带使色带绷紧

Step 1: Open the machine cover




将色带沿金属卡槽位置平整推入
Push the ribbon flatly along the metal slot



第三步：设置标牌
Step 3: Set up signage


1. 将单张标牌放置黑色挡板下调整旋钮，使挡板下方间隙只能通过一张标牌
1. Place a single sign under the black baffle and adjust the knob so that only one sign can pass through the gap under the baffle.

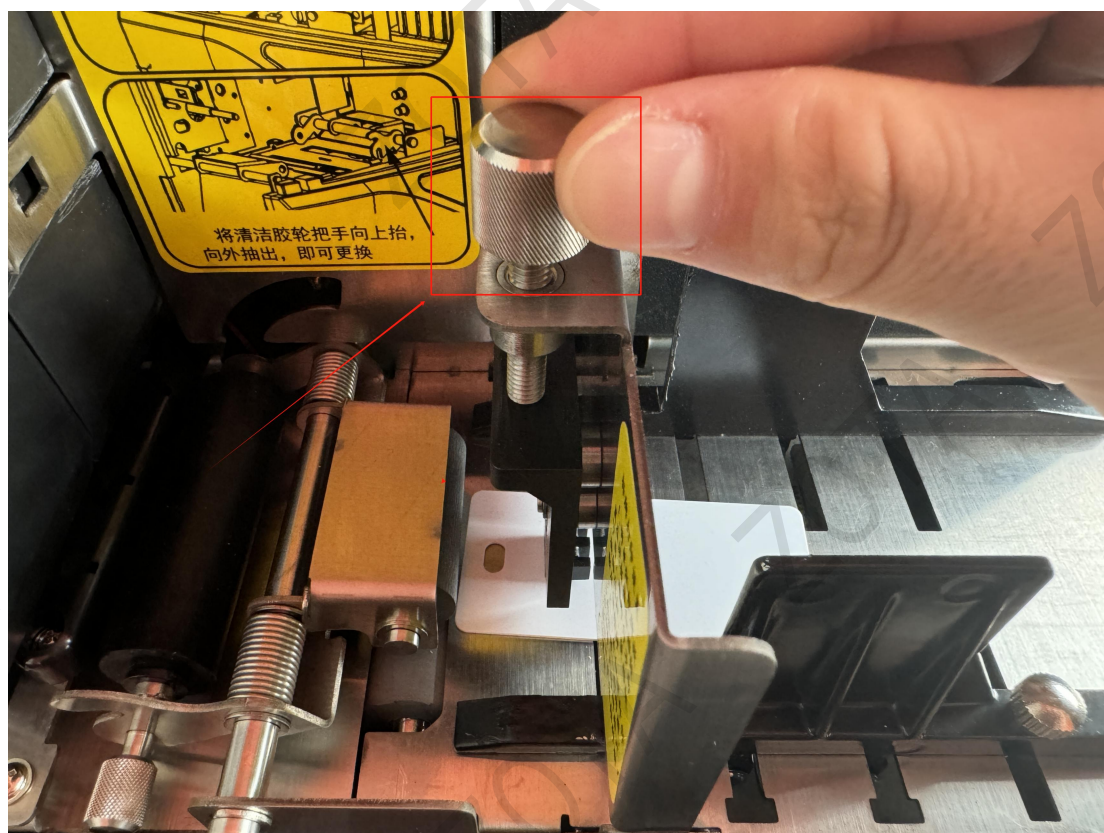


2. 放入第二张标牌测试，确保第二张标牌不能通过
2. Put in the second sign for testing to ensure that the second sign cannot pass



3. 将我们需要打印的标牌整叠放入
- 3.Put the whole stack of signs we need to print

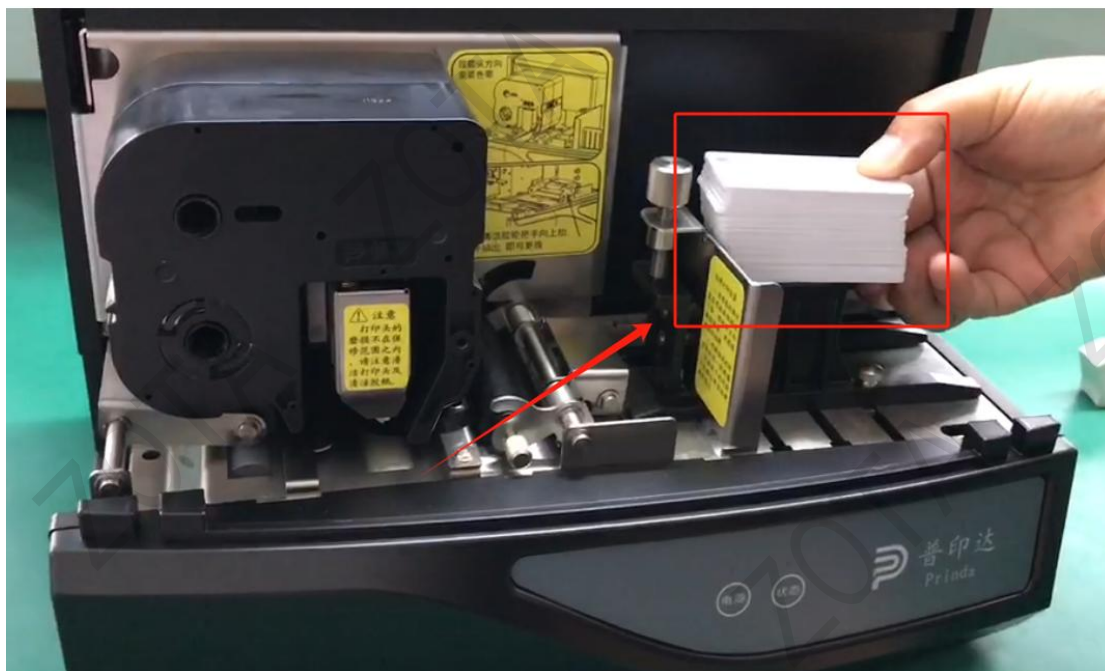


4. 合紧标牌夹板
- 4.Close the sign plate tightly

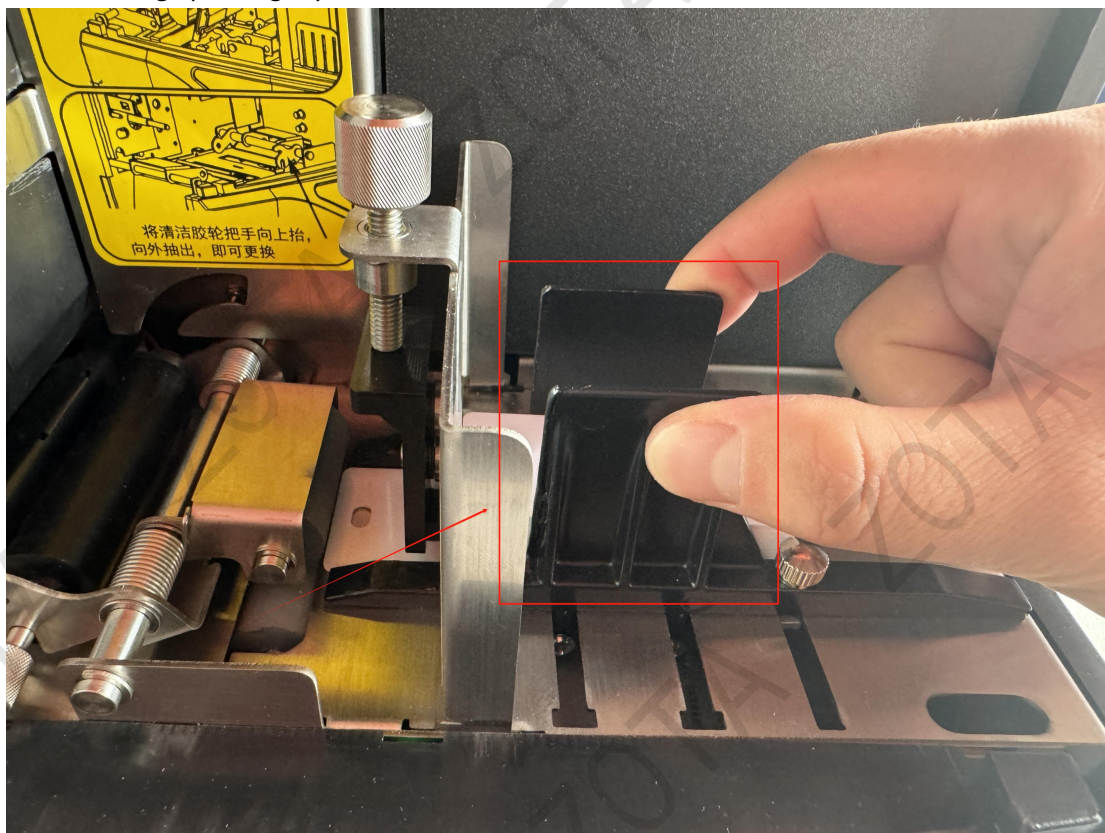

5. 旋紧固定按钮

5.Tighten the fixing button

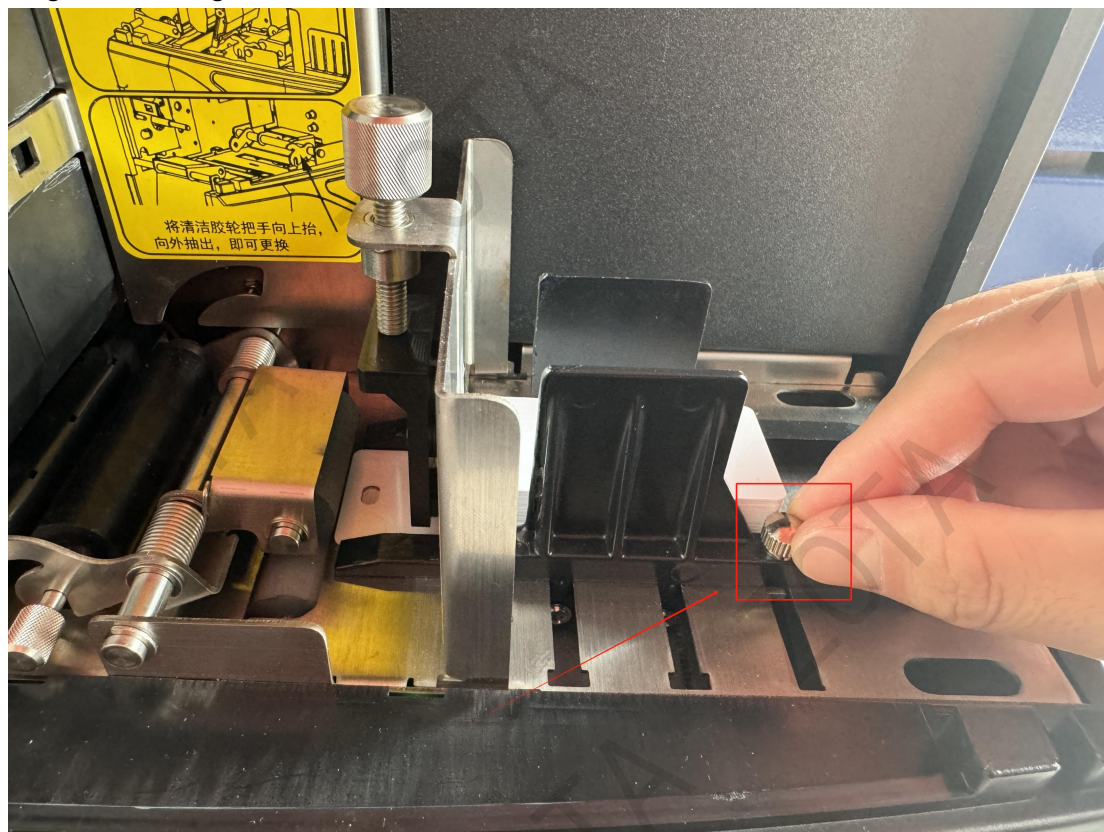

6. 压配重块等待打印

6.Press-fit weight block waiting for printing

